


DIN-Ketten-Nr.	Teilung	Lichte Weite	Hohlbolzen	Buchsen	Schonrollen	Rollen	Bundlaufrollen	Laschenbreite	Laschen- dicke
	p	b <sub>1</sub>	∅ d <sub>8</sub> /d <sub>1</sub>	∅ d <sub>3</sub>	∅ d <sub>4</sub>	∅ d <sub>5</sub>	∅ d <sub>5</sub> /d <sub>6</sub>	g	s
mm									
MC 28	63	20	8,2/13,0	17,5	25	36	36/42	25	3,5
	80								
	100								
	125								
	160								
MC 56	80	24	10,2/15,5	21,0	30	50	50/60	35	4,0
	100								
	125								
	160								
	200								
	250								
MC 112	100	32	14,3/22,0	29,0	42	70	70/85	50	6,0
	125								
	160								
	200								
	250								
	315								
MC 224	160	43	20,3/31,0	41,0	60	100	100/120	70	8,0
	200								
	250								
	315								
	400								
	500								

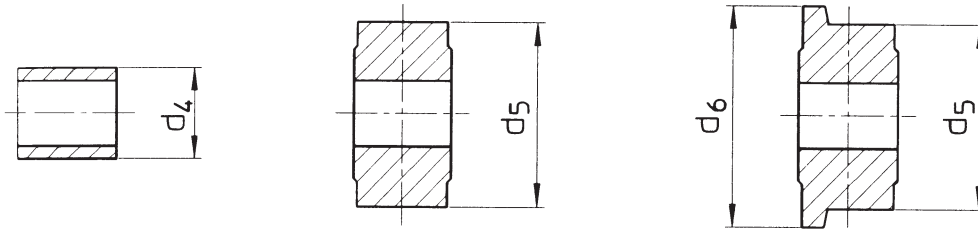

DIN-Ketten-Nr.	Nietbolzenlänge a max.	Schließbolzenüberstand k max.	Bruchkraft	Gelenkfläche	Gelenkflächenpressung zul.	Kettengewicht			
						ohne Rolle	mit Schonrolle	mit Laufrolle	mit Bundlaufrolle
						kg/m			
	mm		kN	cm <sup>2</sup>	N/cm <sup>2</sup>				
MC 28	39,0	3,5	28	3,64	1090	2,27	2,86	4,05	4,29
						2,08	2,55	3,48	3,67
						1,94	2,31	3,06	3,21
						1,83	2,12	2,72	2,84
						1,73	1,96	2,43	2,52
MC 56	45,0	4,0	56	5,11	1560	3,67	4,45	7,18	7,66
						3,37	4,00	6,19	6,57
						3,14	3,64	5,39	5,69
						2,93	3,32	4,69	4,93
						2,79	3,10	4,19	4,38
						2,67	2,92	3,79	3,95
MC 112	62,5	4,8	112	9,90	1610	7,99	9,70	15,40	16,46
						7,33	8,70	13,26	14,11
						6,76	7,83	11,39	12,05
						6,35	7,20	10,05	10,59
						6,02	6,71	8,99	9,41
						5,75	6,29	8,10	8,44
MC 224	82,0	5,5	224	18,60	1720	14,16	17,20	27,17	28,91
						13,09	15,52	23,49	24,88
						12,23	14,18	20,55	21,67
						11,52	13,06	18,13	19,01
						10,94	12,16	16,14	16,84
						10,51	11,48	14,67	15,23